


Nozzles



Fan of Jets



WIND RESISTANCE					
SPLASH					
NOISE LEVEL					
VISIBILITY					
WATER APPEARANCE	GLASS CLEAR				
WATER LEVEL DEPENDENT	NO				
FLOW STRAIGHTENER VANE	YES				
BALL JOINT	NO				

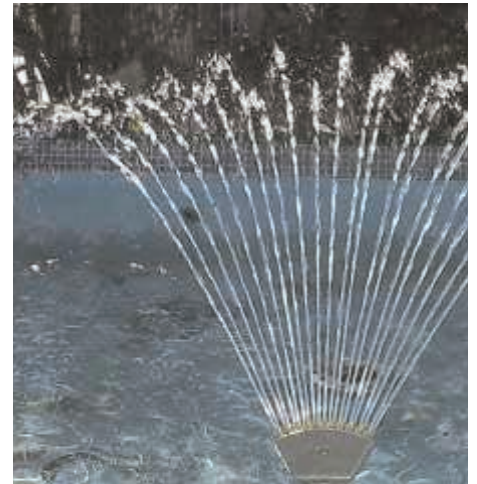

Commonly used as secondary effect nozzles, Fan of Jet nozzles create a beautiful water shape when installed in an interlaced position.

It should be installed on a ball joint to adjust the desired inclination.

It includes a manhole cover to facilitate cleaning.



TECHNO WATER DESIGNS
The Art of Water

Design Studio & Workshop • Unit 4, 33 Jade Drive Molendinar 4214

Ph • +617 5597 5882

E • info@techno-waterdesigns.com.au

W • www.techno-waterdesigns.com.au


FAN OF JETS

Reference	FJ 51006	FJ 51017
-----------	----------	----------

Connection	G 1" H		G 1" H	
Nr. of jets	11		21	
Spray angle	30°	45°	30°	45°

Horizontal range, L (m)	Q	P	A	V	Q	P	A	V	Q	P	A	V	Q	P	A	V
	L/min	m.c.a.	mm	mm	L/min	m.c.a.	mm	mm	L/min	m.c.a.	mm	mm	L/min	m.c.a.	mm	mm
0,50	18	0,40	600	72	27	0,80	1500	125	36	0,40	500	72	37	0,50	600	125
1,00	30	1,15	1200	144	35	1,20	2200	250	55	1,05	1050	144	53	1,05	1250	250
1,50	41	1,72	1650	216	41	1,55	2750	375	71	1,55	1500	216	67	1,40	1800	375
2,00	51	2,20	2050	288	47	1,80	3200	500	85	2,00	1850	288	80	1,70	2200	500
2,50	59	2,60	2400	361	52	2,05	3550	625	97	2,40	2200	361	91	1,95	2600	625
3,00	66	2,95	2700	433	55	2,20	3850	750	110	2,75	2500	433	102	2,10	2850	750
3,50	72	3,25	2950	505	57	2,35	4100	875	120	3,05	2750	505	112	2,30	3100	875
4,00	76	3,55	3150	577	59	2,50	4300	1000	128	3,30	2900	577	120	2,40	3250	1000
4,50	77	3,80	3350	649	61	2,60	4450	1125	133	3,50	3000	649	127	2,50	3350	1125
5,00	78	4,00	3500	722	62	2,65	4500	1250	137	3,70	3100	722	136	2,55	3450	1250

Material	Brass	Brass	Brass	Brass
Weight Kg	1,280	1,280	1,365	1,365

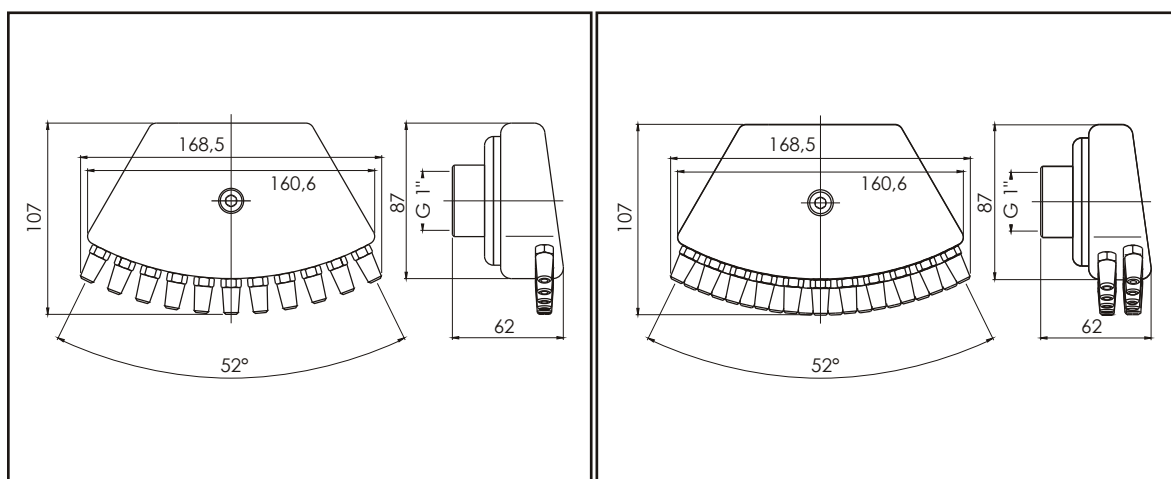

Q: Flow P: Pressure H: Female m.c.a.: metre head 10 m.c.a.= 1 BAR Measures in mm

NO CHROME FINISH ALLOWED

