


## Hollow Jet

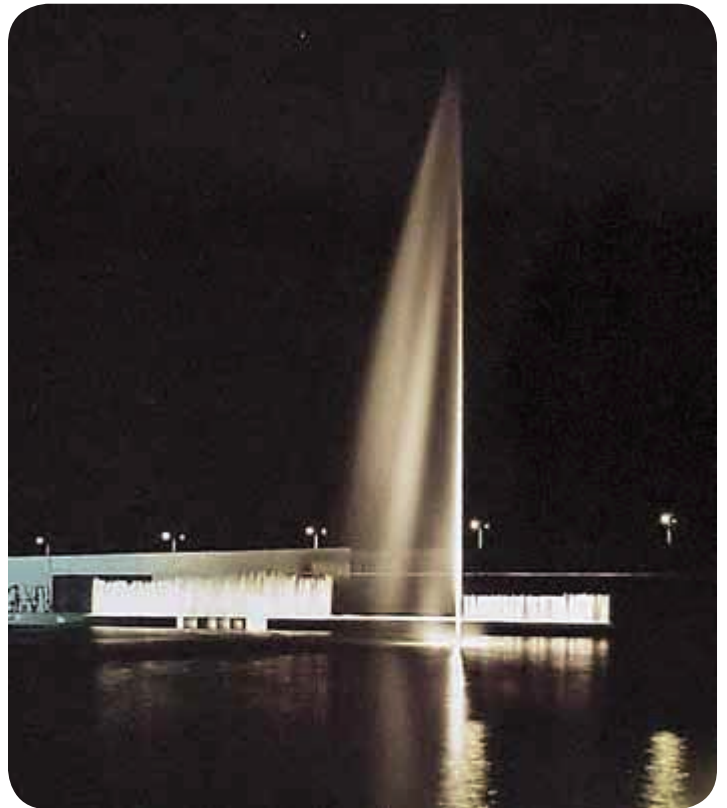

|                  |       |  |  |  |
|------------------|-------|--|--|--|
| WIND RESISTANCE  |       |  |  |  |
| SPLASH           |       |  |  |  |
| NOISE LEVEL      |       |  |  |  |
| VISIBILITY       |       |  |  |  |
| WATER APPEARANCE | CLEAR |  |  |  |

The hollow jet nozzle achieves the same performance as the lance jet nozzle III, but with considerable savings in flow and energy.

The water jet, being hollow, requires less power in a pump than its equivalent in lance jets, which means significant energy savings in operation due to low power consumption of the pump.

| HOLLOW JET |                   |                  |                      |                |           |                |                        |      |      |      |       |       |       |       |       |
|------------|-------------------|------------------|----------------------|----------------|-----------|----------------|------------------------|------|------|------|-------|-------|-------|-------|-------|
| Dimensions |                   |                  |                      |                |           |                | Performance            |      |      |      |       |       |       |       |       |
| Reference  | Connection<br>BSP | Outlet<br>B (mm) | Length<br>C x D (mm) | Suction filter | Balljoint | Weight<br>(kg) | Spray<br>height<br>(m) | 1    | 3    | 5    | 7     | 9     | 10    | 15    | 20    |
| HJ 33002   | 3" F/H            | Ø48              | 327 x<br>Ø101        | 2              | ✗         | 2,2            | l/min                  | 168  | 305  | 405  | 478   | 525   | 550   |       |       |
|            |                   |                  |                      |                |           |                | m.c.a                  | 1,80 | 5,00 | 8,00 | 11,40 | 14,30 | 15,90 |       |       |
| HJ 33013   | 3" F/H            | Ø70              | 409 x<br>Ø102        | 2              | ✗         | 3,1            | l/min                  | 395  | 700  | 920  | 1120  | 1390  | 1510  | 1870  |       |
|            |                   |                  |                      |                |           |                | m.c.a                  | 1,60 | 4,10 | 6,60 | 9,70  | 12,20 | 13,50 | 17,50 |       |
| HJ 35004   | DN125             | Ø125             | 701 x<br>Ø247        | 2              | ✓         | 15,2           | l/min                  | 1583 | 2333 | 3000 | 3667  | 4350  | 4700  | 5720  | 6060  |
|            |                   |                  |                      |                |           |                | m.c.a                  | 1,70 | 4,50 | 7,60 | 11,00 | 14,00 | 15,60 | 20,30 | 21,80 |

Brass + Stainless steel

