

Nozzles

Snowy Jet



WIND RESISTANCE					
SPLASH					
NOISE LEVEL					
VISIBILITY					
WATER APPEARANCE	FOAMY				
WATER LEVEL DEPENDENT	NO				
FLOW STRAIGHTENER VANE	NO				
BALL JOINT/SWIVEL FLANGE	NO				



The internal working system of the Snowy Jet takes air from outside, mixing it with water, obtaining a very rich air/water mixture.

This in turn produces a very frothy and bubbly water.

These nozzles have a very high water oxygenation capacity.



TECHNO WATER DESIGNS
The Art of Water

Design Studio & Workshop • Unit 4, 33 Jade Drive Molendinar 4214

Ph • +617 5597 5882

E • info@techno-waterdesigns.com.au

W • www.techno-waterdesigns.com.au


SNOWY JET

Reference	SJ 91208	SJ 01007	SJ 9106	SJ 0153	SJ 02008	SJ 92007
-----------	----------	----------	---------	---------	----------	----------

Connection	G ½" M	G 1" M	G 1" M	G 1½" M	G 2" M	G 2" M
Outlet diameter	24 mm	32 mm	50 mm	50 mm	75 mm	80 mm

Jet height m	Q	P	Q	P	Q	P	Q	P	Q	P	Q	P
	L/min	m.c.a.	L/min	m.c.a.	L/min	m.c.a.	L/min	m.c.a.	L/min	m.c.a.	L/min	m.c.a.
0,25	37,5	0,3	38	0,60	102	0,6	70	0,7	150	0,4	195	1,20
0,50	56,0	1,4	49	1,00	135	1,6	88	1,1	217	0,8	240	1,60
0,75	66,0	2,4	61	1,50	157	2,8	106	1,6	262	1,2	280	2,30
1,00	75,0	3,1	71	2,10	175	3,7	123	2,1	308	1,7	320	2,90
1,50	94,0	4,7	86	3,60	206	5,4	152	2,9	360	2,4	385	3,90
2,00	109,0	6,0	97	4,44	233	7,2	175	3,8	415	3,1	430	4,90
2,50	116,0	7,0	107	5,40	255	8,6	194	4,7	472	4,1	485	6,30
3,00	120,0	7,7			273	9,7	212	5,7	516	5,0	535	7,20
3,50					284	10,9	221	6,3	570	5,9	575	8,20
4,00					294	11,8	230	7,3	605	6,7	605	9,50
4,50					299	12,8			640	7,5	650	10,40
5,00					305	13,4			685	8,4	685	11,40
5,50					308	13,9			720	9,2		
6,00					310	14,3			755	10,2		
6,50												
7,00												
7,50												

Material	Brass	S.teel/plastic/Brass	Brass	S.Steel/Brass	S.Steel/Brass	Brass
Weight kg	0,64	0,44	7,68	1,40	2,30	7,68

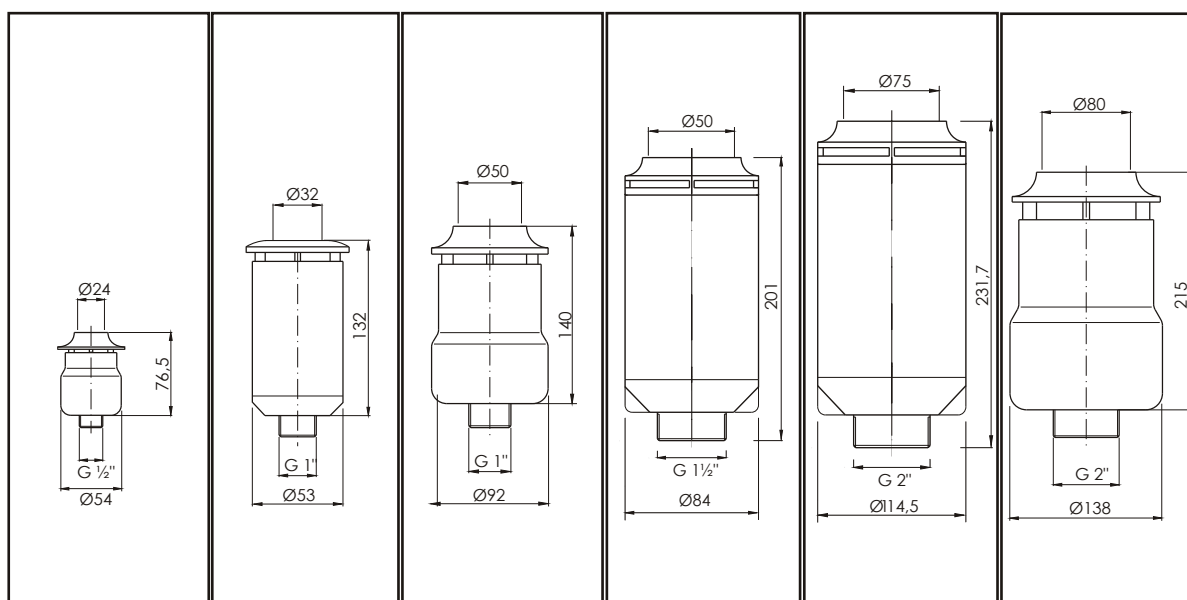

Q: Flow P: Pressure M: Male L/min: litres/minute m.c.a.: metre head 10 m.c.a.= 1 BAR Measures in mm.

CHROME OPTION: SAME REFERENCE NUMBER ENDING WITH "C"

